

## SPECIFICATION FOR APPROVAL

### 1. Material

Production:	Nanodust Cores
KDM.P/N:	KAM107-075A
AL:	$74(nH/N^2) \pm 8\%$
Material:	75 $\mu$
Coating Color:	Khaki
Coating material:	epoxy
Coating Breakdown Voltage:	1000V, 0.5mA, 2Sec




### 2. Physical Characteristics

Before Coating			After Coating			Le(cm)	Ae(cm <sup>2</sup> )	V(cm <sup>3</sup> )	W(cm <sup>2</sup> )	Weight (g) (ref.)	Box Quantity (Pieces)
OD(Max.) in/mm	ID(Min.) in/mm	Ht(Max.) in/mm	OD(Max.) mm	ID(Min.) mm	Ht(Max.) mm						
1.059 26.90	0.579 14.70	0.340 8.64	27.70	14.10	9.45	6.352	0.497	3.155	1.561	21.6	560


### 3. Electrical Parameters(Typical) Temperature(25°C ± 2°C)

Test Item	Test Condition	Value(Typical)	Test Instrument
Inductance	$\phi$ 0.8mm/34Ts, 20kHz/1V, I=0A (Evenly full windings)(均匀绕满)	85.5 $\mu$ H $\pm$ 8%	CH3302
DC-Bias	$\phi$ 0.8mm/34Ts, 20kHz/1V, I=15A(H=100Oe) (Evenly full windings)(均匀绕满)	40.1 $\mu$ H (Min.)	WK3255B+WK3265B
Core Loss	50kHz/1000Gs	250mW/cm <sup>3</sup> (Max.)	SY-8219
Remarks	Set the internal resistance of LCR meter to 100 $\Omega$ .(电感测试仪内阻设置100 $\Omega$ )		

#### Core Loss Curves(Typical)

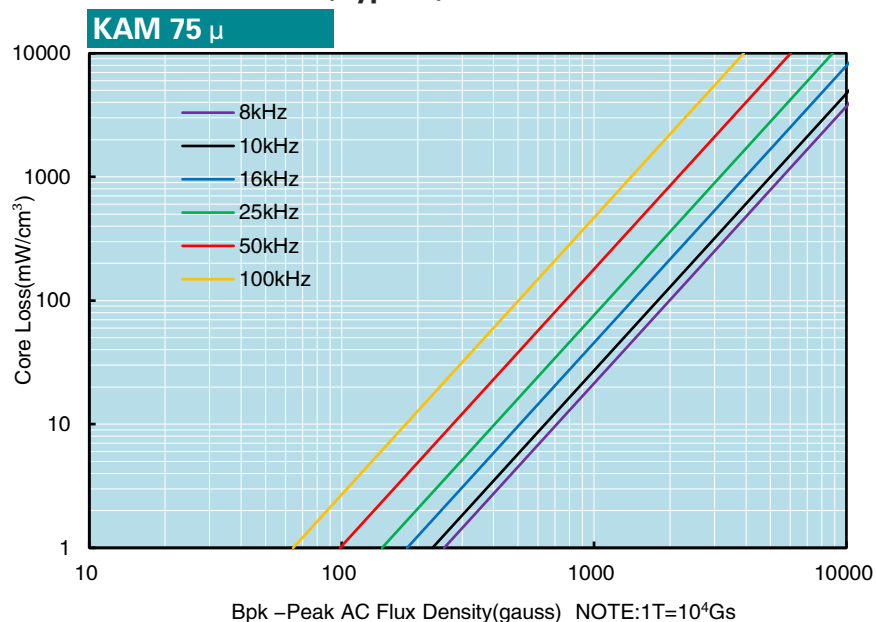

#### DC-Bias Curves(Typical)

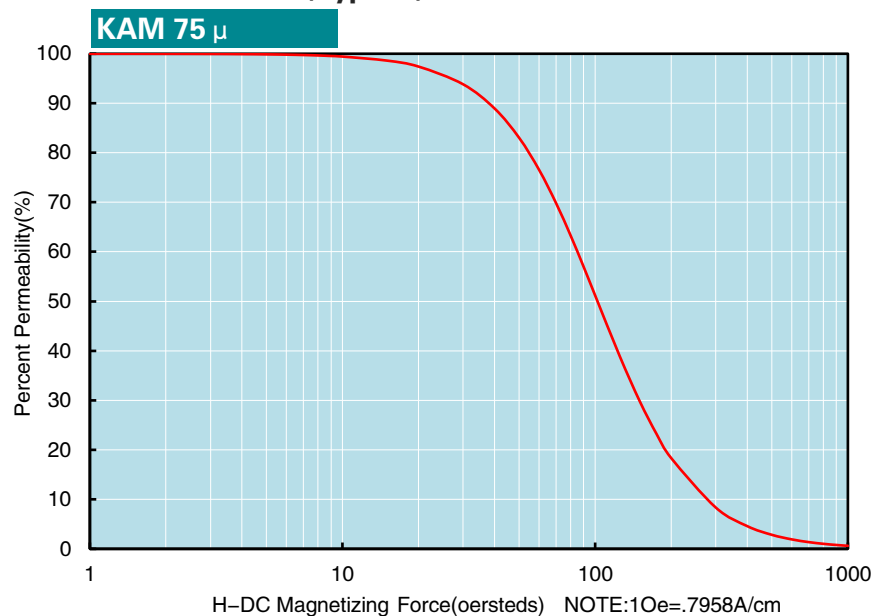

KDM确认栏  
KDM  
Signature

**科达磁电  
技术部**

客户确认栏  
Customer  
Signature

请在5个工作日内回签承认书，否则此承认书将作为后续订单的OQC标准。若有疑问，请及时联系我司RD部门。  
Please sign back after approval within 5 working days, otherwise this approval sheet would be taken as OQC standard for subsequent orders. If you have any questions, please contact RD department in time.